




China 6203 Bearing Supplier

Good quality chrome steel KOYO needle roller bearing HK2220

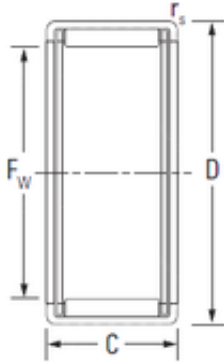

Bearing No. HK2220

HK2220 Bearing 2D drawings and 3D CAD models

Size	22x28x20 mm
Bore Diameter	22 mm
Outer Diameter	28 mm
Width	20 mm
Fw	22 mm
D	28 mm
C	20 mm
r5 min.	1 mm
Weight	0.026 Kg
Basic dynamic load rating (C)	15.30 kN
Basic static load rating (C0)	25.50 kN
(Grease) Lubrication Speed	9600 r/min
Category	Needle Non Thrust Roller Bearings
Inventory	0.0
Manufacturer Name	KOYO
Minimum Buy Quantity	N/A
Weight / Kilogram	0.03
Product Group	B04144
Rolling Element	Needle Roller Bearing
Component	Roller Assembly with Outer Ring - No Inner Ring
Enclosure	Open
Self Aligning	No
Retainer	Yes



China 6203 Bearing Supplier

Number of Rows of Rollers	Single Row
Separable	No
Closed End	No
Inch - Metric	Metric
Relubricatable	No
Thrust Bearing	No
Long Description	22MM Bore; 28MM Outside Diameter; 20MM Width; Needle Roller Bearing; Roller Assembly with Outer Ring - No Inner Ring; Open Enclosure; No Self Aligning; Retainer; Single Row of Rollers; No Separable; N
Other Features	2 Rib Outer Ring Drawn Cup Bearing Steel Cage
Category	Needle Non Thrust Roller Bearing
UNSPSC	31171512
Harmonized Tariff Code	8482.40.00.00
Noun	Bearing
Keyword String	Needle
Manufacturer URL	http://www.koyousa.com
Manufacturer Item Number	HK2220
Weight / LBS	0.057
Bore	0.866 Inch 22 Millimeter
Width	0.787 Inch 20 Millimeter
Outside Diameter	1.102 Inch 28 Millimeter
Bearing No.	HK2220
C3(min)	\
rs(min)	1
Cr	15.30
C0r	25.50
Cu	4.00



China 6203 Bearing Supplier

Grease lub.	9600
Oil lub.	15000
(Refer.) Mass(kg)	0.026
Mounting inner ring	JR17x22x23